

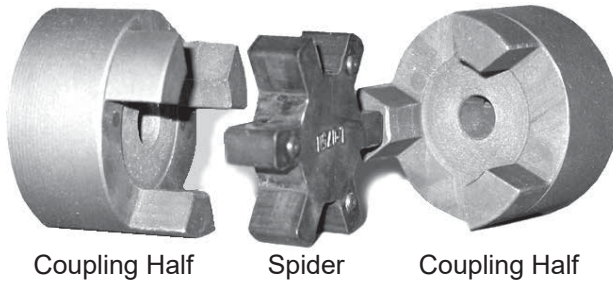


JAW COUPLINGS


Type 1



Type 2

Jaw Coupling - Dimensions (inches)

		Hub Dia	Overall Length	Distance Between Flanges	Length Thru Bore			Avg. Wt. Lbs	Set Screw Thread Size	Set Screw Qty.
Coupling	Type	A	B	C	D	E	HD			
L035	1	0.625	0.813	0.281	0.266	-	-	0.10	#6-32UNCX1/8"	1
L050	1	1.063	1.721	0.470	0.625	-	-	0.29	1/4"-20UNCX3/16"	1
L070	1	1.375	2.000	0.500	0.770	-	-	0.56	1/4"-20UNCX1/4"	2
L075	1	1.750	2.126	0.480	0.820	-	-	0.95	1/4"-20UNCX3/8"	2
L090	1	2.125	2.146	0.490	0.841	-	-	1.45	1/4"-20UNCX3/8"	2
L095	1	2.125	2.520	0.455	1.020	-	-	1.70	5/16"-18UNCX3/8"	2
L099	1	2.531	2.835	0.650	1.071	-	-	2.50	5/16"-18UNCX3/8"	2
L100	1	2.531	3.459	0.660	1.368	-	-	3.40	5/16"-18UNCX3/8"	2
L110	1	3.313	4.252	0.843	1.706	-	-	6.40	3/8"-16UNCX5/16"	2
L150	1	3.750	4.500	0.940	1.771	-	-	8.90	3/8"-16UNCX1/2"	2
L190	2	4.500	5.250	0.875	2.134	1.340	4	8.75	1/2"-13UNCX1/2"	2
L225	2	5.000	6.142	0.942	2.500	1.733	4.25	12.25	1/2"-13UNCX1/2"	2


Spiders - Buna-N (Rubber), Hytrel, Urethane, Bronze

Buna-N (Black)		Hytrel (White)		Urethane (Orange)		Bronze	
Part#	Wt.	Part#	Wt.	Part#	Wt.	Part#	Wt.
L035N	.01						
L050N	.01	L050H	.01	L050U	.01	L050B	.01
L070N	.01	L070H	.04	L070U	.01	L070B	.01
L075N	.01	L075H	.04	L075U	.02	L075B	.02
L090N	.01	L090H	.04	L090U	.02	L090B	.02
L095N	.01	L095H	.04	L095U	.02	L095B	.02
L099N	.01	L099H	.06	L099U	.02	L099B	.02
L100N	.01	L100H	.06	L100U	.02	L100B	.02
L110N	.16	L110H	.20	L110U	.20	L110B	.20
L150N	.30	L150H	.30	L150U	.30	L150B	.30
L190N	.40	L190H	.40	L190U	.40	L190B	.40
L225N	.40	L225H	.40	L225U	.40	L225B	.40

Note: All inserts have a closed center except Bronze inserts which have an open center.